

**Aline Mono**



**Professional architectural linear** light system suspended mounted, made of extruded aluminium adapt for Indoor applications, diffuser made on polycarbonate (PC) UV resistance, available in 2 different lengths, anodized aluminium black finish.


LED mono-colour, diffused light effect, with LEDs rigid circuit, high performance with CRI>90, 220Volt Direct Voltage, 25Watt/Meter with SDCM<3 (One Bin Only), lumen and available CCT as reported below.

Impact IK08 and protection IP44

Operating ambient temperature from -20°C / +40°C

**Produced in Italy.**

**Image & Drawing**

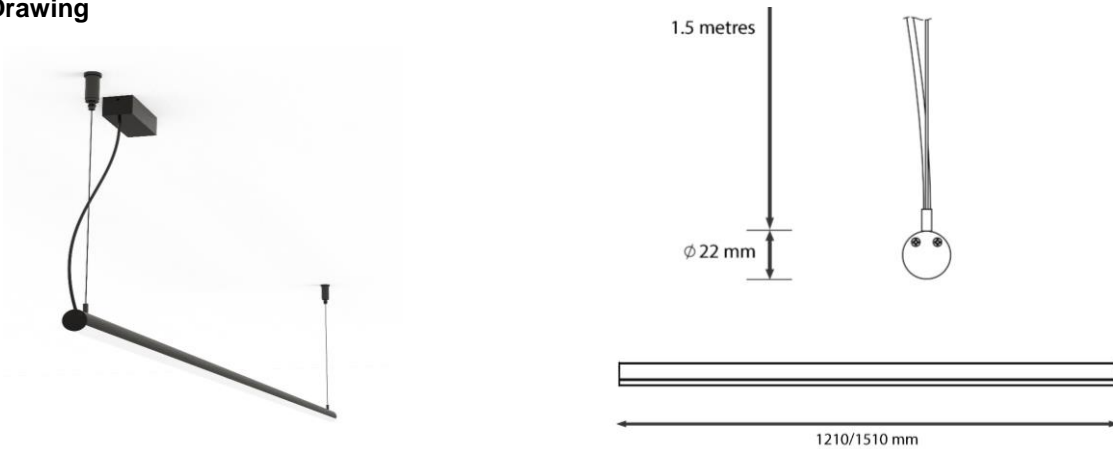

**Product Final Code**

CCT	4 ft / 1220mm	5 ft / 1525mm
2700K	Aline4.AN.27K	Aline5.AN.27K
3000K	Aline4.AN.30K	Aline5.AN.30K
4000K	Aline4.AN.40K	Aline5.AN.40K



### Lumen Output LED

Length	Wattage	<u>2700K</u>	<u>3000K</u>	<u>4000K</u>
4 ft / 1220mm	28	2419	2419	2822
5 ft / 1525mm	35	3024	3024	3528

### Technical Data

Application	Surface Mounted
Finish	Aluminum Anodized
Dimension mm	22 x 1210 - 1510 & Custom
Fitting Life	L90 100.000h; L70B20 (Ta,55°C) Lifetime: >54000h of LM-80
Operating Temp.	-20° C - +40° C

### Specification Product

Light distribution	Diffused
CRI	>90
SDCM	SDCM<3
Wattage	25Watt/Meter
Voltage	220V Direct Voltage
IK Impact	IK08
Weight	
Accessories	Fixing Kit
Other Accessories	Driver Box Included