

## Neon 1616 RGBW V




**LIMITLESS Premium NEON Flex** light made of Flexible printed circuit technology (FPC), encapsulation polyurethane offering ultimate waterproof, UV resistance, RGB + W 3000K, adaptable for outdoor applications. Diffused light effect 150°, using LEDs high performance, with SDCM<3 (One Bin Only), input voltage 24Volt CV, available 15Watt/Meter lumen and available CCT as reported below. Cable length 1000mm.

Protection IP68


Operating ambient temperature from -25°C to 55°C.

Produced in Italy.

### Image & Drawing

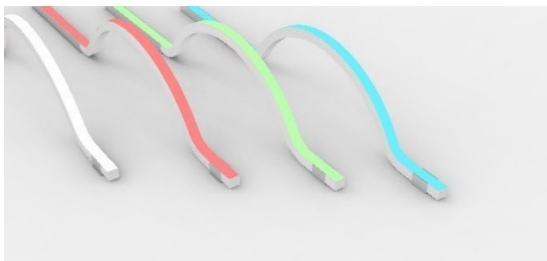

### Vertical Bending

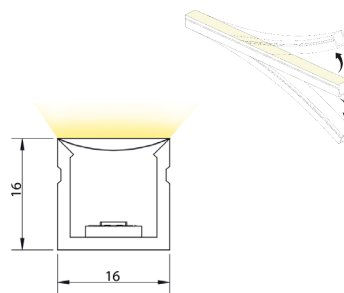

### Product Final Code Vertical Bending


CCT	CRI	W/mt	W/Reel	Lumen/mt delivered	Code
RGB+W 3000K	CRI90	15	25	575	LV16-NEON15W.90.IP68.RGBW

## Neon 1616 RGBW V

Application	Surface/Recessed mounted as per aluminum profile
Dimension mm	16 x 16 x 5000 & Custom
Cutting	Every 100mm
Fitting Life	L90 B10 (Ta ,25°C) - Reported TM-21 L70 Lifetime: >54000 hours
Operating Temp.	-20°C - +55°C

### Specification Product

Light distribution	Diffused 150°
CRI	>90
SDCM	SDCM<3
Wattage	15 W/m
Voltage	24V DC / Min 23 - Max 25
Class	III
Weight	
Other Accessories	Aluminum & Drivers to be ordered separately

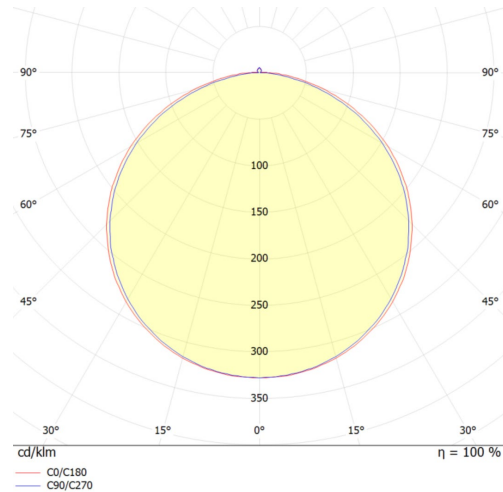

### Driver Accessories



Code DMX002  
 Constant Voltage DMX IP20  
 DC 24V: min 10 - max 26Vdc  
 4 x 5A channel (Max 10A total)  
 4 x 120W channel (Max 240W total)



Code D001  
 IP67 75Watt  
 Input Voltage 85 - 264VAC  
 Output Voltage 24 Volt  
 Output Current 3.15 A



Code D004  
 IP67 150Watt  
 Input Voltage 85 - 264VAC  
 Output Voltage 24 Volt  
 Output Current 6.25 A

### Installation Accessories



Code  
 L-AL055 - Kit PVC Profile U 1000\*27\*18  
 L-AL056 - Kit PVC Profile U 2000\*27\*18