

**TAP 30 Projector**



**Architectural Projector** surface mounted for landscaping installation, made of aluminium adapted for Outdoor applications, optic made of polycarbonate (PC) UV resistance, available in 4 different beam angles, powder coating finish White, Grey, Black and Corten. integrated with Driver Converter 24VDC.


LED mono-colour, optics light effect, with LEDs high performance with CRI>90, 24V, 2Watt with SDCM<3 (One Bin Only), lumen and available CCT as reported below.

Protection IP67

Operating ambient temperature from -20°C / +55°C

**Designed and Produced in Italy.**

**Image & Drawing**

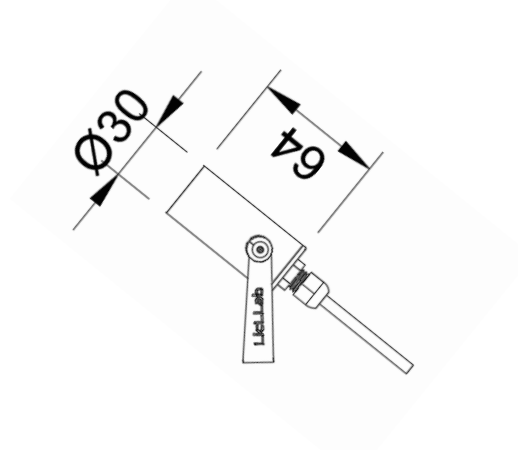

**Product Code**

	Body White	Body Black	Body Grey	Corten Grey
<b>Initial Code</b>	TAP30.WH.	TAP30.BK.	TAP30.GR.	TAP30.CT.
<b>CCT</b>	27K	30K	40K	
<b>Optics</b>	SS(5°) S(15°)	M(25°) MF(38°)	OV(10*45°)	

**Final Code**

Ex: TAP30.WH.27K.S

## TAP 30 Projector

### Lumen Delivered LED

Wattage	2700K	3000K	4000K
2	199	199	211

### Optics

SS	S	M	MF	OV
5°	15°	25°	38°	10*45°

### Technical Data

Application	Projector Mounted
Finish	Aluminum Powder finish
Dimension mm	30*64mm
Fitting Life	L90 100.000h; L70B20 (Ta,55°C) Lifetime: >54000h of LM-80
Operating Temp.	-20° C - +55° C

### Specification Product

Light distribution	See optics
CRI	>90
SDCM	SDCM<3
Wattage	2 Watt
Voltage	24V DC
IK Impact	IK08
Weight	/
Accessories	Spike, HoneyComb, Antiglare*
Other Accessories	




## TAP 30 Projector

**H004**

Honeycomb louver

Antiglare

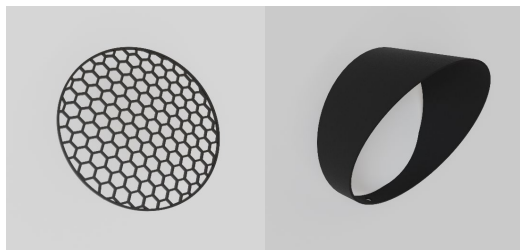

**LSP011**

Spike AISI 300mm

**LSP012**

Spike PC

