
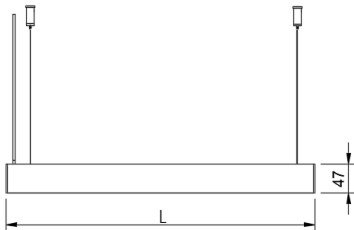



AKIRA Suspended Double emission

AKIRA is a linear light system crafted from high-quality extruded aluminum, designed for indoor applications. It features a UV-resistant polycarbonate (PC) diffuser for uniform, glare-free illumination. Available in three standard lengths or fully customizable, it comes in four elegant finishes: anodized silver, powder-coated black, white, and grey. Equipped with high-performance mono-color LEDs on a rigid circuit board, it delivers a diffused light effect with CRI>90 for superior color accuracy.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	Finishes	+	CTT	+	Optics
AKSSD		1 508 mm		WH White		27 2700K		D Diffused
		2 1008 mm		BK Black		30 3000K		
		3 1508 mm		GR Grey		40 4000K		
				AN Anodized Aluminium				

Configuration Example | AKSSD1.WH.27.D

Technical Data

Application	Suspended
Dimensions	31 x 47 x length
Finish	Powder Coating or Anodized aluminium
Fitting Life	L90 100.000h L70B20 (T _a 55°C) Lifetime: >54.000 h of LM-80
Operating Temperature	- 20°C / + 40°C


Specification Product

Light Distribution	Diffused
CRI	> 90
SDCM	< 3
Wattage	20 + 18 Watt/meter
Voltage	24 Volt CV
IK impact	IK08

Lumen Data

CTT	508 mm Delivered lm/m	1008 mm Delivered lm/m	1508 mm Delivered lm/m
2700K	1596	3192	4788
3000K	1748	3496	5244
4000K	1929	3857	5786

Light Distribution

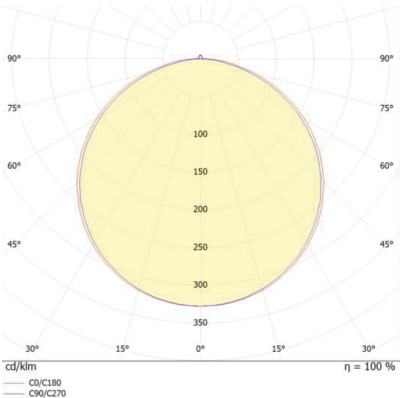

Drivers

D021	D022	D023	D026
			
On/Off 60 Watt	On/Off 75 Watt	On/Off 100 Watt	Dali 100 Watt