
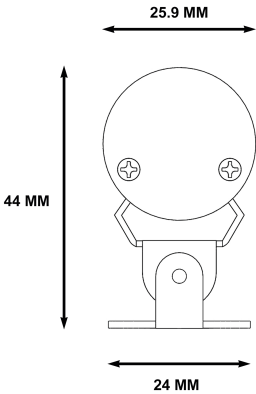


CovT Mono

CovT is designed for cove lighting, crafted from high-quality extruded aluminum for indoor applications. Its UV-resistant polycarbonate (PC) diffuser ensures smooth, uniform illumination. Available in five lengths with an elegant anodized aluminum finish, it features high-performance mono-color LEDs on a rigid circuit board, delivering a diffused light effect with CRI>95 for superior color accuracy. A 100mm male and female cable allows for quick and easy loop connections.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	.AN	+	CTT
L-COVT	1	1 ft 305 mm				27K 2700K
	2	2 ft 610 mm				30K 3000K
	3	3 ft 915 mm				40K 4000K
	4	4 ft 1220 mm				
	5	5 ft 1525 mm				

Configuration Example | L-COVT.IAN.27K

Technical Data

Application	Surface Mounted
Finish	Anodized aluminium
Dimensions	24 x 44 x length
Fitting Life	91.000h L70B20 (Ta,55°C) Reported TM-21 L70 Lifetime: >54000 hours
Operating temperature	- 20°C / + 40 °C

Specification Product

Light Distribution	Diffused
CRI	> 90
SDCM	< 3
Wattage	25 Watt/meter
Voltage	24 Volt DC
Brackets	Included

Lumen Data

CTT	1 ft - 305 mm - 7 W Delivered lm/m	2 ft - 610 mm - 14W Delivered lm/m	3 ft - 915 mm - 21W Delivered lm/m
2700K	605	1210	1814
3000K	605	1210	1814
4000K	706	1411	2117

CTT	4 ft - 1220 mm - 28 W Delivered lm/m	5 ft - 1525 mm - 35W Delivered lm/m
2700K	2419	3024
3000K	2419	3024
4000K	2822	3528

Drivers

D021



On/Off
60 Watt

D022



On/Off
75 Watt

D023



On/Off
100 Watt

D048



DALI
240 Watt max