




# LIMITLESS Neon 25x25 Mono Vertical

The LIMITLESS NEON is a versatile flexible lighting solution, utilizing advanced Flexible Printed Circuit (FPC) technology. Encased in durable polyurethane, it offers exceptional waterproofing, UV resistance, and resistance to solvents and salt water, ensuring long-lasting performance in harsh outdoor environments.



**Product Final Code** | Select a component for each column for final configuration

| Product ID | + | Wattage                  | + | .90.IP67 | + | CTT                                                                     |
|------------|---|--------------------------|---|----------|---|-------------------------------------------------------------------------|
| LV25-NEON  |   | 20W   20W/m<br>100W/Reel |   |          |   | 24K   2400K<br>27K   2700K<br>30K   3000K<br>40K   4000K<br>50K   5000K |

Configuration Example | LV25-NEON20W.90.IP67.24K

## Technical Data

|                       |                                                               |
|-----------------------|---------------------------------------------------------------|
| Application           | Surface mounted<br>or Recessed                                |
| Dimensions            | 25 x 25 x 5000 mm                                             |
| Cutting               | Every 100 mm                                                  |
| Fitting Life          | L90B10 (Ta,25°C)<br>Reported TM-21 L70<br>Lifetime: > 54.000h |
| Operating Temperature | - 20°C / + 45 °C                                              |


## Specification Product

|                    |               |
|--------------------|---------------|
| Light Distribution | Diffused 150° |
| CRI                | > 90          |
| SDCM               | < 3           |
| Wattage            | 20 Watt/m     |
| Voltage            | 24 Volt DC    |
| Class              | III           |

## Lumen Data

| CTT   | 20W/m - 100W/Reel<br>Delivered lm/m |
|-------|-------------------------------------|
| 2400K | 1050                                |
| 2700K | 1090                                |
| 3000K | 1160                                |
| 4000K | 1220                                |
| 5000K | 1250                                |

## Light Distribution

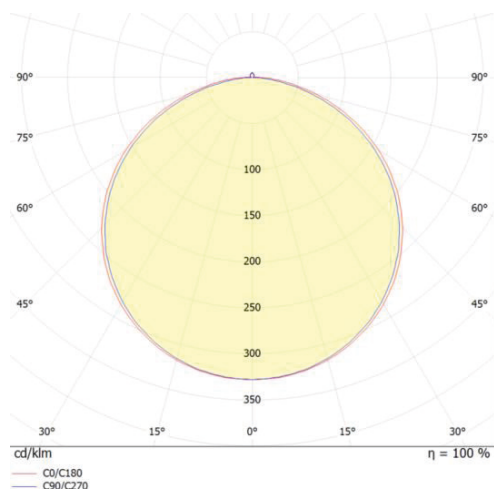

## Drivers

D001



On/Off  
75 Watt

D004



On/Off  
150 Watt

D048



DALI  
240 Watt  
(max)

## Accessories

Kit aluminium profile U



Section:  
28 x 27 mm  
L-AL071 | L = 1000  
L-AL072 | L = 2000

Kit 10 nos aluminium profile U



Section:  
28 x 27 mm  
L-AL075 | L = 30