
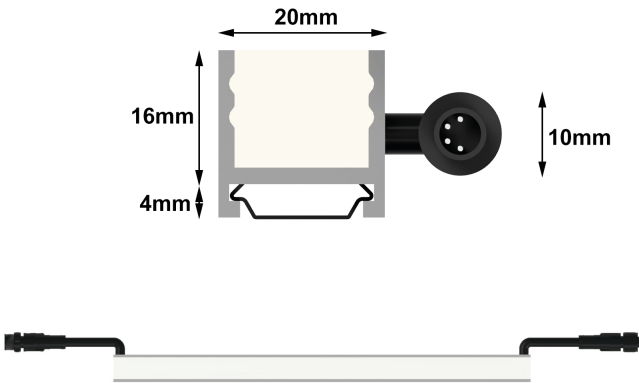


PERFIL Plus 20

PERFIL Plus 20 is designed for indoor and outdoor use, this surface-mounted linear light features a durable extruded aluminum body with IP67 waterproof and IK10 impact resistance. Its polyurethane encapsulation ensures UV protection and longevity. Available in five lengths with an anodized aluminum finish, it delivers diffused mono-color lighting with high-performance 2835 LEDs (CRI>90, SDCM<3). Operating at 12W/m with a 24V constant voltage and integrated ICs, it ensures efficiency and stability.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	.90	+	CTT
L-PC		3.5W 1ft 305mm				18K 1800K
		7W 2ft 610mm				22K 2200K
		10.5W 3ft 915mm				27K 2700K
		14W 4ft 1220mm				30K 3000K
		17.5W 5ft 1525mm				40K 4000K
						50K 5000K

Configuration Example | L-PC.3.5W.90.18K

Technical Data

Application	Surface mounted
Dimensions	20 x 20 x length / custom
Finish	Anodized Aluminium 25µm
Fitting Life	53.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime:>54000 hours
Operating Temperature	- 20°C / + 50 °C

Specification Product

Light Distribution	Diffused
CRI	> 90
SDCM	< 3
Wattage	12 Watt/m
Voltage	24 Volt DC
IK impact	IK 10
Brackets	Included

Lumen Data

CTT	3.5W - 1ft - 305mm Delivered lm/m	7W - 2ft - 610mm Delivered lm/m	10.5W - 3ft - 915mm Delivered lm/m
1800K	355	709	1064
2200K	362	724	1086
2700K	387	773	1160
3000K	418	836	1253
4000K	448	895	1343
5000K	463	926	1389

CTT	14W - 4ft - 1220mm Delivered lm/m	17.5W - 5ft - 1525mm Delivered lm/m
1800K	1419	1773
2200K	1448	1810
2700K	1546	1933
3000K	1671	2089
4000K	1790	2238
5000K	1852	2315

Drivers

D014



On/Off
75 Watt

D016



On/Off
150 Watt

D001



On/Off
75 Watt

D004



On/Off
150 Watt

Accessories

Male connector



M8 4x0.35

L-CB101 | L = 300

L-CB102 | L = 1000

L-CB103 | L = 5000

Female connector



M8 4x0.35

L-CB104 | L = 300

L-CB105 | L = 1000

L-CB106 | L = 5000

Male and female extension connector



M8 4x0.35

L-CB107 | L = 300

L-CB108 | L = 5000