


Strip COB Mono OUT

The Premium COB LED Strip Light is designed with advanced Flexible Printed Circuit (FPC) technology. Available in four different CCT options, it features 480 or 528 high-performance LEDs per meter with a CRI of 90+. The strip emits a smooth, diffused light with a 120° beam angle and operates on a 24V constant voltage (CV) input, with power options of 10W/m and 15W/m. For easy installation, it includes a 150mm connection cable and 3M adhesive backing for secure mounting.

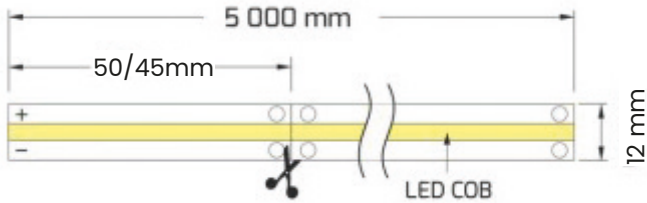

Product Final Code | Select a component for each column for final configuration

Product ID	+	Wattage	+	.90.IP67	+	CCT
L-ST		10W 10W/m				27K 2700K
		15W 15W/m				30K 3000K
						40K 4000K
						60K 6000K

Configuration Example | L-ST10W.90.IP67.27K

Technical Data

Application	As per aluminium profile*
Dimensions	12 x 3.5 x 5000 & custom
Cutting size	50 or 45 mm
Operating temperature	-20°C / +55°C

Specification Product

Light Distribution	Diffused 120°
CRI	> 90
SDCM	< 3
Wattage	10 or 15 Watt/meter
Voltage	24 Volt DC
Class	III

*Aluminium profiles and drivers to be ordered separately

Lumen Data

CTT	10W/meter - 50W/reel Reel Lumen	15W/meter - 75W/reel Reel Lumen
2700K	4400	6600
3000K	4625	6935
4000K	5625	8435
6000K	6565	9835

Drivers

D014



On/Off
75 Watt

D016



On/Off
150 Watt

D001



On/Off
75 Watt

D004



On/Off
150 Watt