


# HO2 Square

HO2 is a recessed ceiling-mounted downlight that combines a compact design with cutting-edge LED technology, making it ideal for indoor applications. Crafted from durable aluminum with a sleek powder-coated finish in white or black, it seamlessly blends into any space. Designed for effortless installation, it includes a 100mm male and female cable for quick and secure driver connection. Perfect for modern, high-performance lighting solutions.

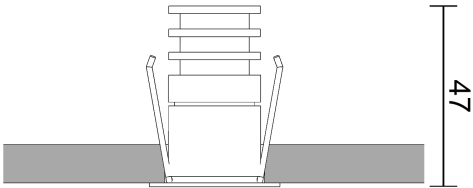

## Product Final Code | Select a component for each column for final configuration

| Product ID | + | Finishes    | + | CTT        | + | Optics   |
|------------|---|-------------|---|------------|---|----------|
| HO2SQ      |   | WH   White  |   | 27   2700K |   | SS   15° |
|            |   | BK   Black  |   | 30   3000K |   | S   25°  |
|            |   | NK   Nickel |   | 40   4000K |   | M   36°  |
|            |   | CR   Chrome |   |            |   | MF   55° |

Configuration Example | HO2SQ.WH.27.MS

## Technical Data

|              |                                                                               |
|--------------|-------------------------------------------------------------------------------|
| Application  | Recessed                                                                      |
| Finish       | Powder coating                                                                |
| Dimensions   | 34 x 34 x 47 mm                                                               |
| Cut - Hole   | 26 mm                                                                         |
| Fitting Life | 100.000h L80 B20 (Ta ,25°C)<br>Reported TM-21 L70<br>Lifetime: >100.000 hours |

## Specification Product

|                    |                       |
|--------------------|-----------------------|
| Light Distribution | 15° - 25° - 36° - 55° |
| CRI                | 90                    |
| SDCM               | < 3                   |
| Wattage            | 2 Watt                |
| Voltage            | 3 Volt                |
| Springs            | Included              |

## Lumen Data

| CTT   | Flux Lumen | Delivered Lumen |
|-------|------------|-----------------|
| 2700K | 234        | 199             |
| 3000K | 234        | 199             |
| 4000K | 248        | 211             |

## Drivers

D035



On/Off  
Min 1 - Max 3


D032



Dali  
Push Button  
Min 3 - Max 12

## Accessories

H-002



Honeycomb