

HO6 Square


HO6 is a recessed ceiling-mounted downlight that combines a compact design with cutting-edge LED technology, making it ideal for indoor applications. Crafted from durable aluminum with a sleek powder-coated finish in white or black, it seamlessly blends into any space. Designed for effortless installation, it includes a 100mm male and female cable for quick and secure driver connection. Perfect for modern, high-performance lighting solutions.

CRI 90

≤3 MAC
ADAM

IP44

DIMMABLE

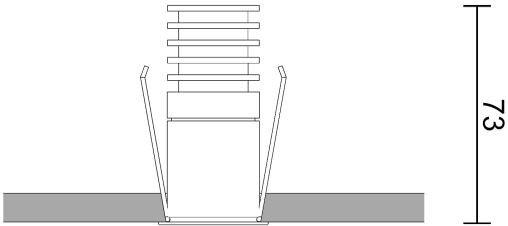

Product Final Code | Select a component for each column for final configuration

Product ID	+	Finishes	+	CTT	+	Optics
HO6SQ		WH White		27 2700K		S 19°
		BK Black		30 3000K		M 24°
				40 4000K		MF 37°
						F 45°

Configuration Example | HO6SQ.WH.27.MS

Technical Data

Application	Recessed
Finish	Powder coating
Dimensions	42 x 42 x 73 mm
Cut - Hole	34 mm
Fitting Life	100.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime: >100.000 hours

Specification Product

Light Distribution	19° - 24° - 37° - 45°
CRI	90
SDCM	< 3
Wattage	6 Watt
Voltage	12 Volt
Springs	Included

Lumen Data

CTT	Flux Lumen	Delivered Lumen
2700K	696	612
3000K	726	639
4000K	750	660

Drivers

D077


On/Off
Max 1

D093

Dali - 2
Min 1 - Max 3

Accessories

H-003



Honeycomb