
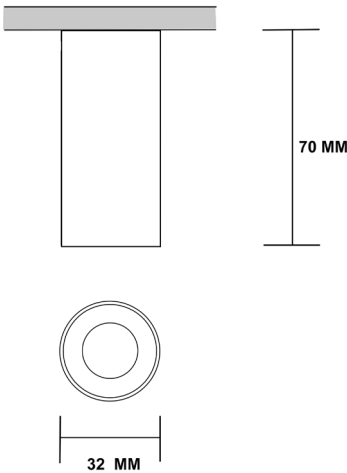


PLAF32 Surface mounted

PLAF is a Professional Architectural surface-mounted ceiling light, expertly crafted from durable aluminum and designed for indoor applications. It features a UV-resistant polycarbonate (PC) optic and is available in four distinct beam angles to suit various lighting needs. Finished with a high-quality powder coating, the Plaf combines style and durability. It includes a 24V converter for effortless connection and seamless integration into any lighting setup.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Finishes	+	CTT	+	Optics	+	Reflectors
PLAF32		WH White		27 2700K		S 15°		WH White
		BK Black		30 3000K		M 25°		BK Black
		GR Grey		40 4000K		MF 38°		GR Grey
						F 60°		AM Amber

Configuration Example | PLAF32.WH.27.S.WH

Technical Data

Application	Surface mounted
Finish	Aluminum Powder
Dimensions	Ø 32 x 70 mm
Cut - Hole	None
Fitting Life	L90 100.000 h L70B20 (ta,55°C) Lifetime: > 54.000 h of LM-80
Operating Temperature	- 20 °C / + 40 °C

Specification Product

Light Distribution	15° - 25° - 38° - 60°
CRI	> 90
SDCM	< 3
Wattage	2 Watt
Voltage	24 Volt DC
IK Impact	IK08

Lumen Data

CTT	Flux Lumen	Delivered Lumen
2700K	234	199
3000K	234	199
4000K	238	211


Drivers

D034



On/Off
8 Watt

D037



DALI
18Watt

D024



DALI
60Watt