
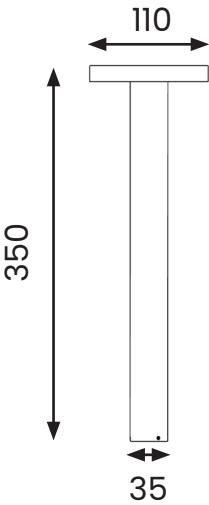
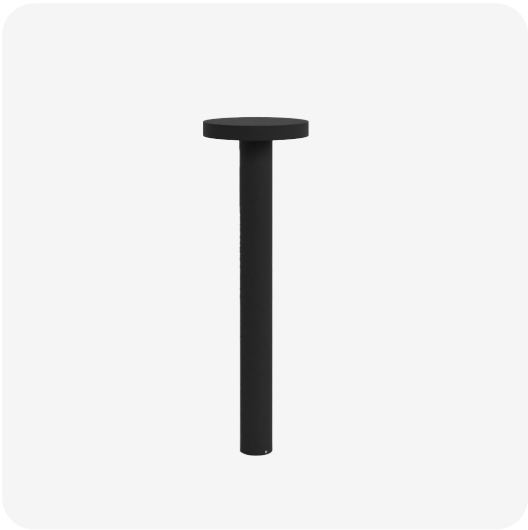


PYLO35

Pylo is a decorative lighting bollard designed to elegantly illuminate pathways, gardens, and outdoor spaces. With its minimalist cylindrical design and soft, uniform light distribution, Pylo enhances the ambiance while ensuring safety and visibility in residential and commercial landscapes. Available with various light color temperatures and finishes options, Pylo offers versatile solutions for landscape designers and urban planners seeking both performance and style.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Finishes	+	CTT
PYLO35		BK Black		27K 2700K
		WH White		30K 3000K
		GR Grey		40K 4000K
		CT Corten		

Configuration Example | PYLO35.BK.27K

Technical Data

Application	Ground
Finish	Aluminium Powder
Dimensions	Ø110 x H350 mm
Fitting Life	53.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime:>54000 hours
Working Temp.	-20° + 55°

Specification Product


Light Distribution	Diffused
CRI	> 90
SDCM	< 3
Wattage	10 W
Voltage	220VAC

Lumen Data

CTT	Delivered Lumen
2700K	890
3000K	980
4000K	1000

Accessories

L-BS016



PVC base
for soil

Drivers

Built-in