

Strip 240 Mono IN

The Premium Mono LED Strip Light is designed with advanced Flexible Printed Circuit (FPC) technology. Available in five different CCT options, it features 240 high-performance LEDs per meter with a CRI of 90+. The strip emits a smooth, diffused light with a 120° beam angle and operates on a 24V constant voltage (CV) input. For easy installation, it includes a 150mm connection cable and 3M adhesive backing for secure mounting.


CRI 90

≤3 MAC ADAM

24V

120°

IP20

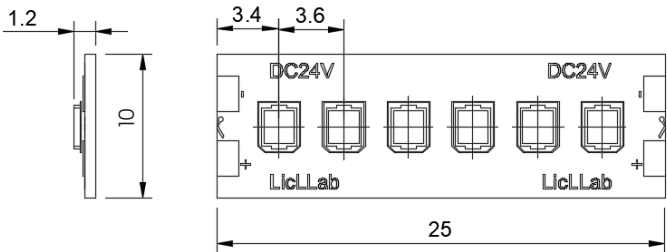

Product Final Code | Select a component for each column for final configuration

Product ID	+	.90.IP20	+	CCT
L-ST19.2W				24K 2400K
				27K 2700K
				30K 3000K
				40K 4000K
				50K 5000K

Configuration Example | L-ST19.2W.90.IP20.24K

Technical Data

Application	As per aluminium profile*
Dimensions	10 x 2.2 x 5000 & custom
Cutting size	25 mm
Operating temperature	-20°C / +45°C
Fitting life	50.000 hours

Specification Product

Light Distribution	Diffused 120°
CRI	> 90
SDCM	< 3
Wattage	19.2 W/meter
Voltage	24 Volt DC
Class	III

*Aluminium profiles and drivers to be ordered separately

Lumen Data

CTT	Reel Lumen
2400K	10080
2700K	10464
3000K	11136
4000K	11712
6000K	12000

Drivers

D014



On/Off
75 Watt

D016



On/Off
150 Watt

D001



On/Off
75 Watt

D004



On/Off
150 Watt