

ZIN

ZIN is a recessed-mounted linear light system designed for cabinet and furniture lighting in indoor applications. Crafted from high-quality extruded aluminum with an anodized finish, it offers a sleek and durable design. Featuring a UV-resistant polycarbonate (PC) diffuser, it ensures consistent and glare-free illumination. This versatile system combines style and functionality, making it ideal for modern interior lighting solutions.


CRI 90

≤3 MAC
ADAM

IP44

IK08

24V

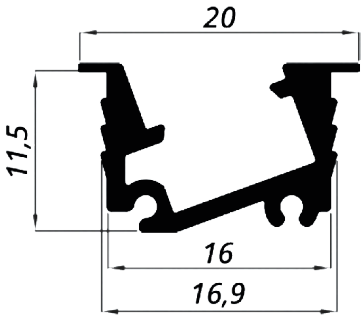

Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	.AN	+	CTT
ZIN		2 2 ft 620 mm		Anodized		27K 2700K 30K 3000K 40K 4000K
		3 3 ft 920 mm				
		4 4 ft 1220 mm				

Configuration Example | ZIN2.AN.27K

.PS at the end of configuration code to add a Proximity hand sensor switch with LED blue

.IR at the end of configuration code to add a Proximity hand sensor switch

.THD at the end of configuration code to add a Proximity hand dimmer switch with LED blue

Technical Data

Application	Recessed
Finish	Anodized aluminium 10µm
Dimensions	20 x 12 x 620 - 920 - 1220 mm
Fitting Life	91.000h L70B20 (Ta,55°C) Reported TM-21 L70 Lifetime: >54000 hours
Operating temperature	- 20°C / + 40 °C

Specification Product

Light Distribution	Diffused
CRI	> 90
SDCM	< 3
Wattage	10 Watt/meter
Voltage	24 Volt DC
Class	III
Fixing Kit	Clips included

Lumen Data

CTT	2 ft - 620 mm - 6 W Delivered lm/m	3 ft - 920 mm - 9W Delivered lm/m	4 ft - 1220 mm - 12W Delivered lm/m
2700K	685	736	760
3000K	1028	1089	1140
4000K	1370	1452	1520

Drivers

D021



On/Off
60 Watt

D022



On/Off
75 Watt

D023



On/Off
100 Watt

D048



DALI
240 Watt max