


ZOOM8S

ZOOM8 is a high-performance LED projector featuring a sleek cylindrical body and equipped with an advanced zoom lens that allows continuous beam angle adjustment from 10° to 55°, offering exceptional flexibility for accent and general lighting applications. The fixture is fully adjustable, allowing both tilt and rotation for precise light aiming. Its compact form factor and precise optics make it ideal for museums, galleries and high-end architectural environments.

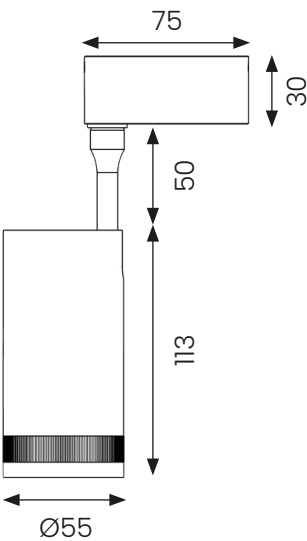

Product Final Code | Select a component for each column for final configuration

Product ID	+	Finishes	+	CTT
ZOOM8S		BK Black		27K 2700K
				30K 3000K
				40K 4000K

Configuration Example | ZOOM8S.BK.27K

Technical Data

Application	Surface
Finish	Powder coated
Dimensions	Ø55 x 113 mm
Fitting Life	100.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime: > 100.000 hours

Specification Product

Light Distribution	Zoom from 10° to 55°
CRI	> 90
SDCM	< 3
Wattage	8 Watt
Voltage	16V

Lumen Data

CTT	Flux Lumen	Delivered Lumen
2700K	928	817
3000K	968	852
4000K	1000	880

Driver

Built-in DALI