
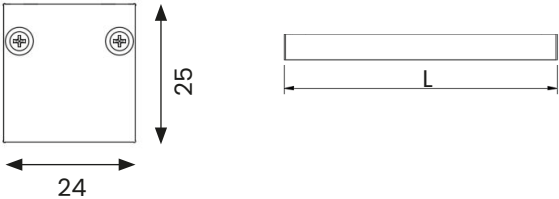
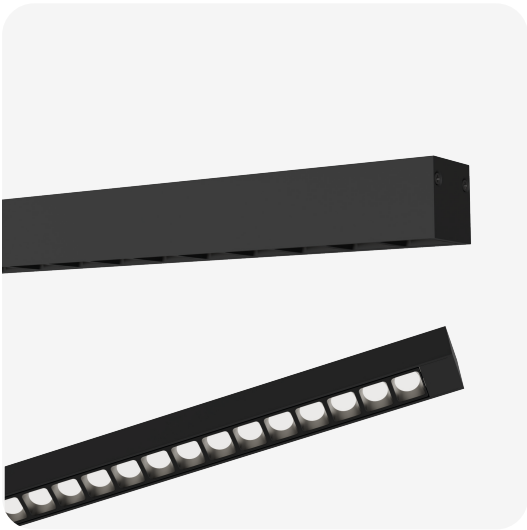


AKIRA Mini Surface

AKIRA Mini, with its compact profile, is a high-quality linear light system crafted from extruded aluminum for indoor applications. Designed with advanced optical solutions, it ensures precise and efficient illumination. Available in three standard lengths or fully customizable, AKIRA Mini comes in two sophisticated finishes: powder-coated black and white. Equipped with high-performance mono-color LEDs on a rigid circuit board, it delivers a diffused light effect with CRI>90, ensuring exceptional color accuracy.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	Finishes	+	CTT	+	Optics
AKMS		1 285 mm		WH White		27 2700K		S 30°
		2 568 mm		BK Black		30 3000K		WM 40°
		3 1128 mm				40 4000K		WW 65°
								D Diffused

Configuration Example | AKMS.WH.27.D

Technical Data

Application	Surface mounted
Dimensions	24 x 25 x length
Finish	Powder Coating
Fitting Life	L90 100.000h L70B20 (T _a 55°C) Lifetime: >54.000 h of LM-80
Operating Temperature	- 20°C / + 40°C

Specification Product

Light Distribution	30° - 40° - 65° Diffused
CRI	> 90
SDCM	< 3
Wattage	26 Watt/meter
Voltage	24 Volt CV
IK impact	IK08

Lumen Data

CTT	258 mm Delivered lm/m	568 mm Delivered lm/m	1128 mm Delivered lm/m
2700K	836	1672	3344
3000K	880	1760	3250
4000K	969	1939	3878

Drivers

D106



On/Off
7.5 Watt

D107



On/Off
15 Watt

D108



On/Off
30 Watt

D109



Dali
7.5 Watt

D110



Dali
15 Watt

D111



Dali
30 Watt