

LED Flex Panel Mono

The LED Flex Panel Mono White is a flexible, ultra-thin lighting solution designed for seamless integration into various applications. It delivers uniform, flicker-free illumination with a monochrome white light output, ensuring consistent brightness and color temperature. Its adaptability makes it ideal for architectural, commercial, and decorative lighting projects. Perfect for backlighting, cove lighting, and custom installations, the LED Flex Panel combines efficiency, versatility, and modern aesthetics.


CRI 90

≤3
MAC
ADAM

24V

120°

IP20

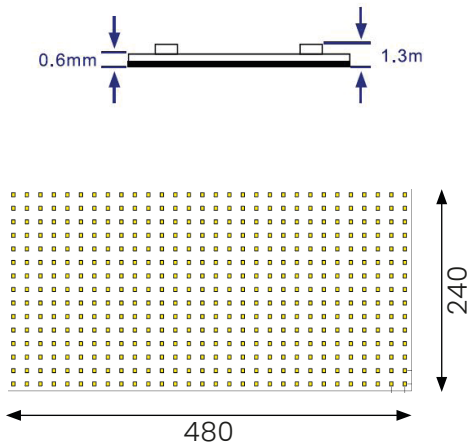

Product Final Code | Select a component for each column for final configuration

Product ID

+

Wattage

+

.IP20

+

CCT

L-PNL

30W | 30W/panel

27K | 2700K

30K | 3000K

40K | 4000K

Configuration Example | L-PNL30W.IP20.27K

Technical Data

Application	Surface or Recessed
Dimensions	480 x 240 mm
Cutting size	17 mm
Operating temperature	-20°C / +45°C
Fitting life	50.000 hours

Specification Product

Light Distribution	Diffused 120°
CRI	> 90
SDCM	< 3
Wattage	30 W/Panel
Voltage	24 Volt DC
Class	III

Lumen Data

CTT	Panel Lumen
2700K	2760
3000K	2760
4000K	3120

Available on request

LED Colours	Red
	Green
	Blue
	Amber

Drivers

D014



On/Off
75 Watt

D016



On/Off
150 Watt

D001



On/Off
75 Watt

D004



On/Off
150 Watt