

Neon 1616 Mono V

LIMITLESS Premium NEON Flex light made of Flexible printed circuit technology (FPC), encapsulation polyurethane offering ultimate waterproof, UV resistance, available in 3 different wattages & 5 different CCT, adapt for outdoor applications. LED mono color, diffused light effect 150°, using LEDs high performance with CRI 90+, with SDCM<3 (One Bin Only), input voltage 24Volt CV, available in 5 - 10 - 15Watt/Meter lumen and available CCT as reported below. Cable length 1000mm.



Protection IP67/68

Operating ambient temperature from -25°C to 45°C.


Produced in Italy.



Image & Drawing

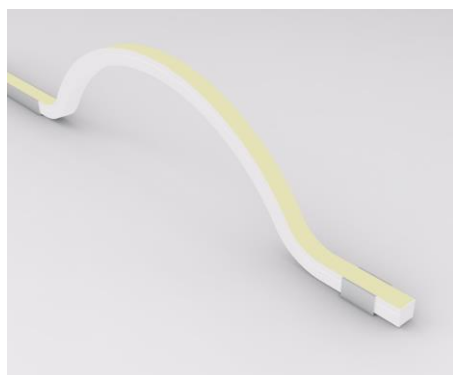

Vertical Bending



Product Final Code Horizontal Bending

CCT	CRI	W/mt	W/Reel	Lumen/mt delivered	Code
2400K	CRI90	5	25	263	LV16-NEON5W.90.IP67.24K
2700K	CRI90	5	25	273	LV16-NEON5W.90.IP67.27K
3000K	CRI90	5	25	290	LV16-NEON5W.90.IP67.30K
4000K	CRI90	5	25	305	LV16-NEON5W.90.IP67.40K
5000K	CRI90	5	25	313	LV16-NEON5W.90.IP67.50K
2400K	CRI90	10	50	525	LV16-NEON10W.90.IP67.24K
2700K	CRI90	10	50	545	LV16-NEON10W.90.IP67.27K
3000K	CRI90	10	50	580	LV16-NEON10W.90.IP67.30K
4000K	CRI90	10	50	610	LV16-NEON10W.90.IP67.40K
5000K	CRI90	10	50	625	LV16-NEON10W.90.IP67.50K
2400K	CRI90	15	75	788	LV16-NEON15W.90.IP67.24K
2700K	CRI90	15	75	818	LV16-NEON15W.90.IP67.27K
3000K	CRI90	15	75	870	LV16-NEON15W.90.IP67.30K
4000K	CRI90	15	75	915	LV16-NEON15W.90.IP67.40K
5000K	CRI90	15	75	938	LV16-NEON15W.90.IP67.50K

Neon 1616 Mono V


Technical Data

Application	Surface/Recessed mounted as per aluminum profile
Dimension mm	16 x 16 x 5000 & Custom
Cutting	Every 100mm
Fitting Life	L90 B10 (Ta ,25°C) - Reported TM-21 L70 Lifetime: >54000 hours
Operating Temp.	-20°C - +45°C

Specification Product

Light distribution	Diffused 150°
CRI	>90
SDCM	SDCM<3
Wattage	5 - 10 - 15 W/m
Voltage	24V DC / Min 23 - Max 25
Class	III
Weight	
Other Accessories	Aluminum & Drivers to be ordered separately

Light Distribution

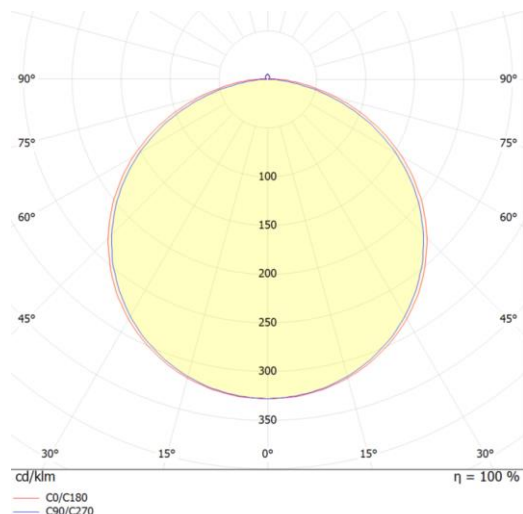

Driver Accessories



Code D048

DALI IP20

DC 24V: min 10 - max 26Vdc

4 x 5A channel (Max 10A total)

4 x 120W channel (Max 240W total)



Code D001

IP67 75Watt

Input Voltage 85 - 264VAC

Output Voltage 24 Volt

Output Current 3.15 A



Code D004

IP67 150Watt

Input Voltage 85 - 264VAC

Output Voltage 24 Volt

Output Current 6.25 A

Neon 1616 Mono V

Installation Accessories



Code

L-AL037 - Kit Aluminum Profile U 1000*19*18

L-AL041 - Kit Aluminum Profile U 2000*19*18



Code

L-AL043 - Kit Aluminum Profile Frame 1000*27*18

L-AL044 - Kit Aluminum Profile Frame 2000*27*18



Code

L-AL045 - Kit Aluminum Profile U 1000*19*39

L-AL046 - Kit Aluminum Profile U 2000*19*39



Code

L-AL047 - Kit Aluminum Profile Frame 1000*27*36

L-AL048 - Kit Aluminum Profile Frame 2000*27*37



Code

L-AL038 - Kit 10 nos Aluminum Profile U
30*19*18mm


LIMITLESS

INSTALLATION INSTRUCTIONS

SURFACE MOUNTED WITH LONG PROFILE



Required Tools



Required Accessories


SURFACE MOUNTED WITH CLIPS



Required Tools






Required Accessories

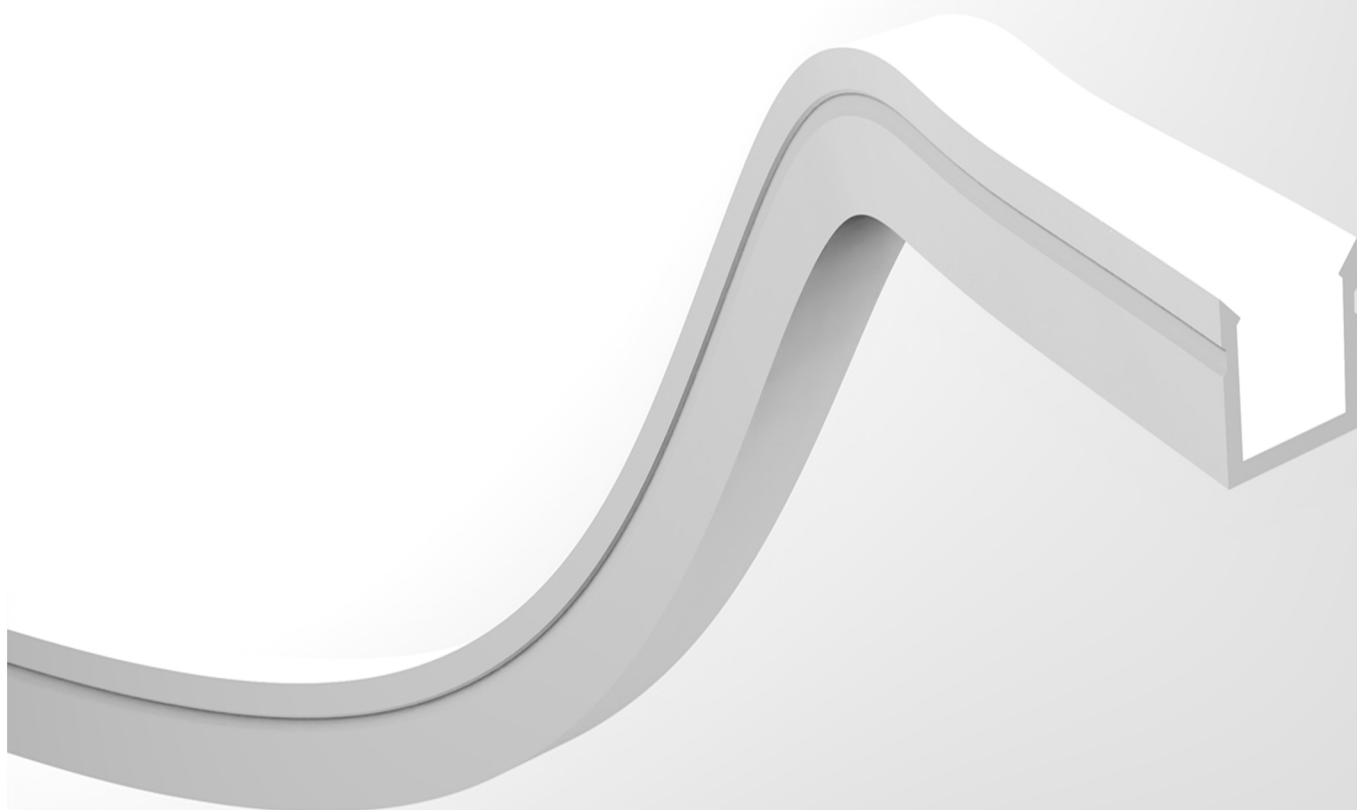



LIMITLESS

INSTALLATION INSTRUCTIONS

HORIZONTAL BENDING

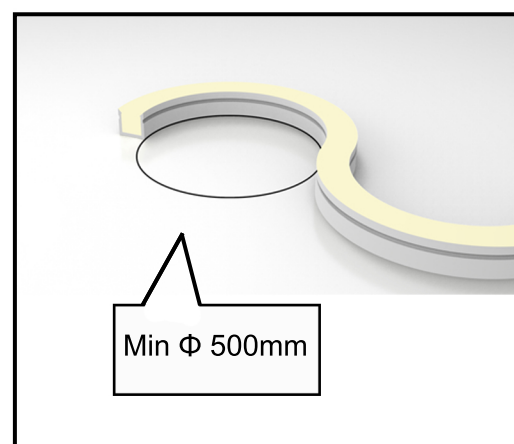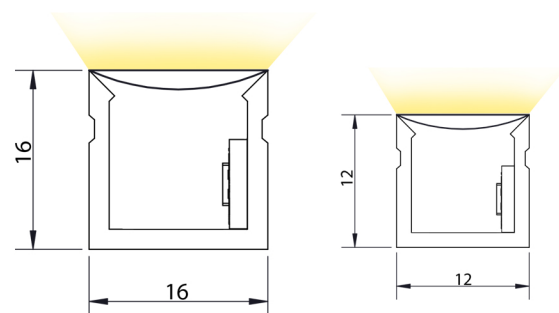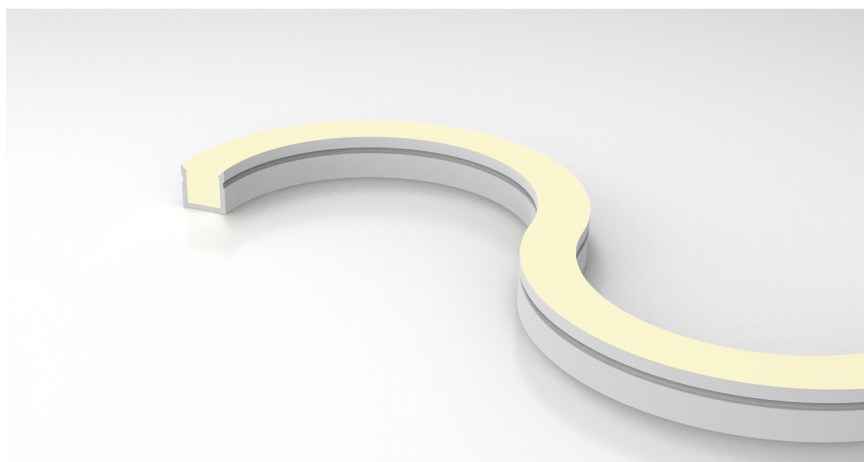


VERTICAL BENDING

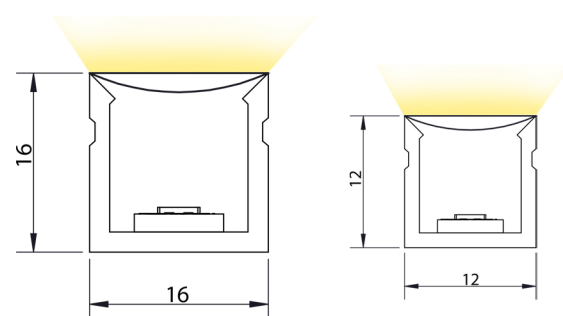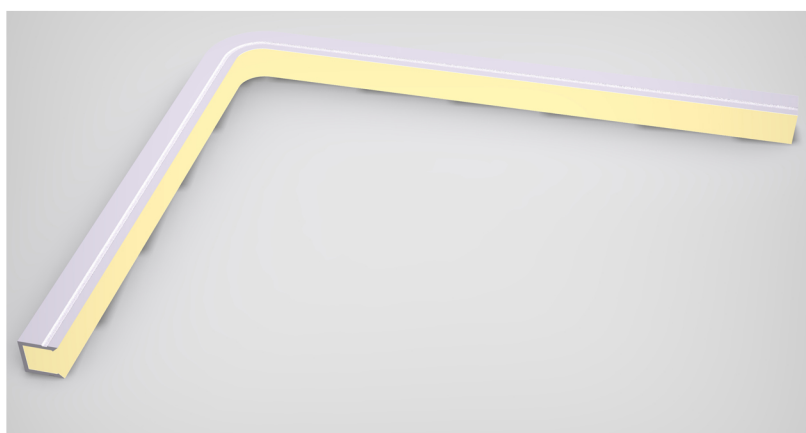

LIMITLESS


INSTALLATION INSTRUCTIONS

SURFACE MOUNTED WITH LONG PROFILE




1.1


L=max 1000 mm
X=min 500 mm
Y=min 250 mm

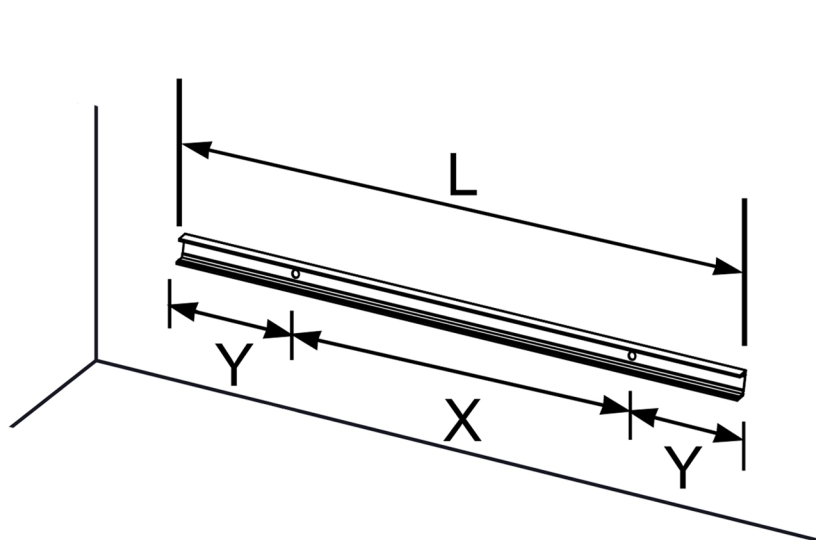


1.2

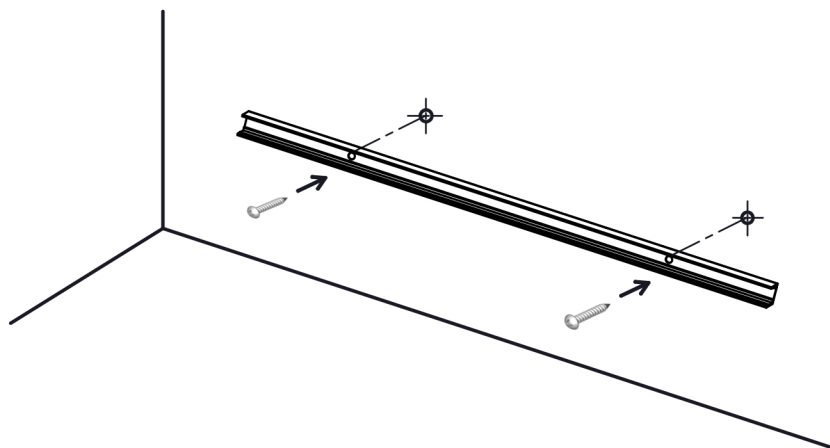


1.3

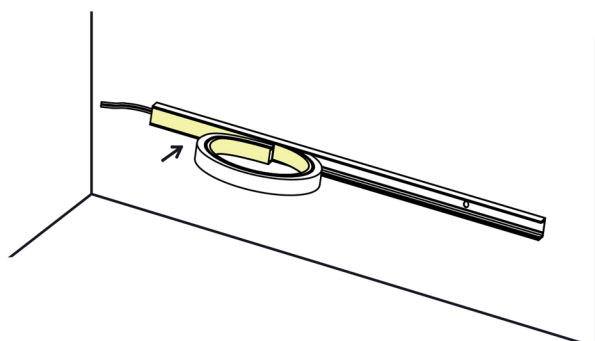


1.4

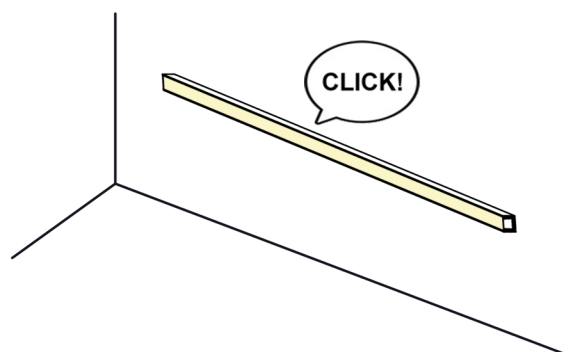

SURFACE MOUNTED WITH CLIPS




2.1

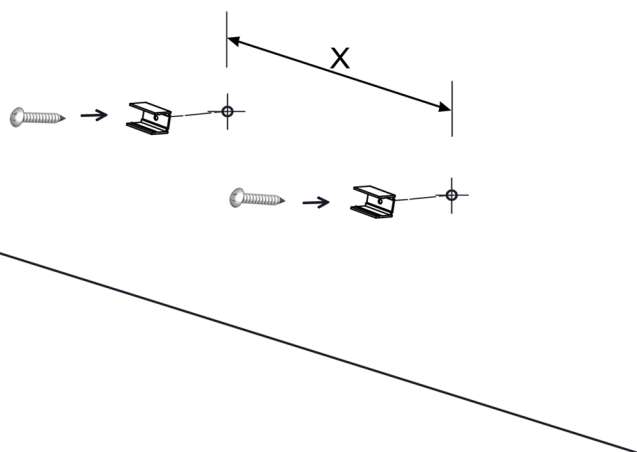



X = max 500 mm

2.2

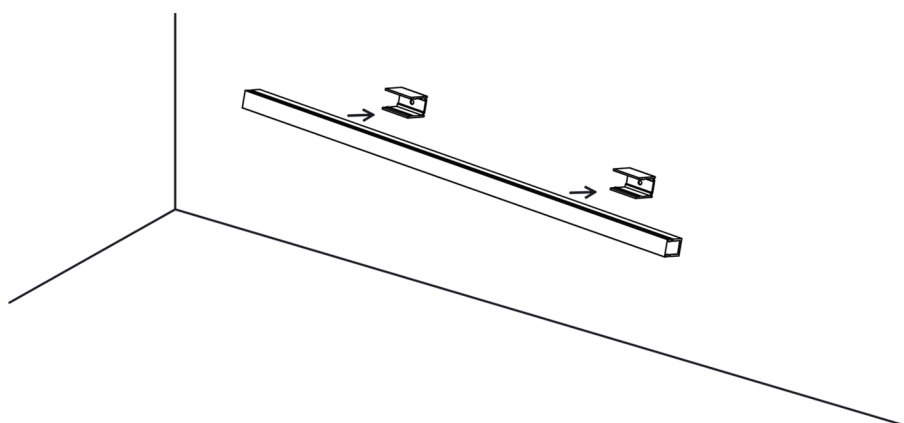


2.3

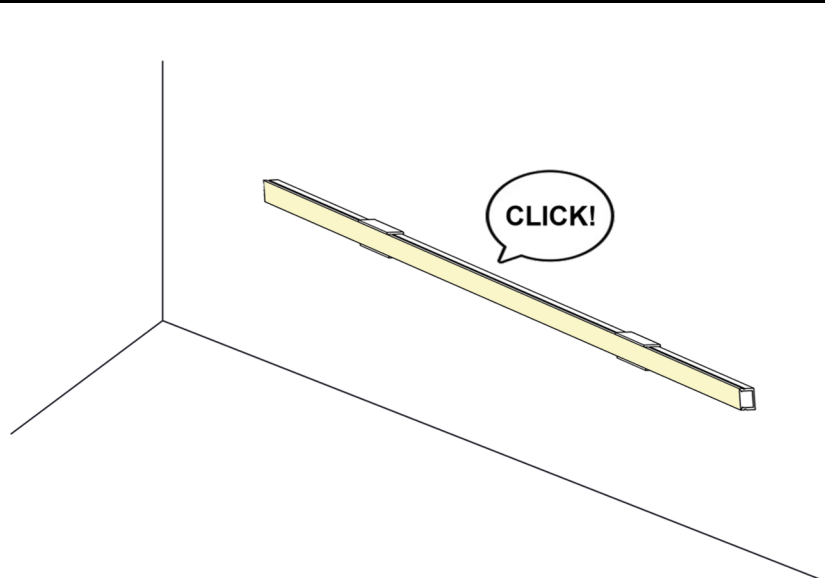



MONO-COLOUR DRIVER CONNECTION

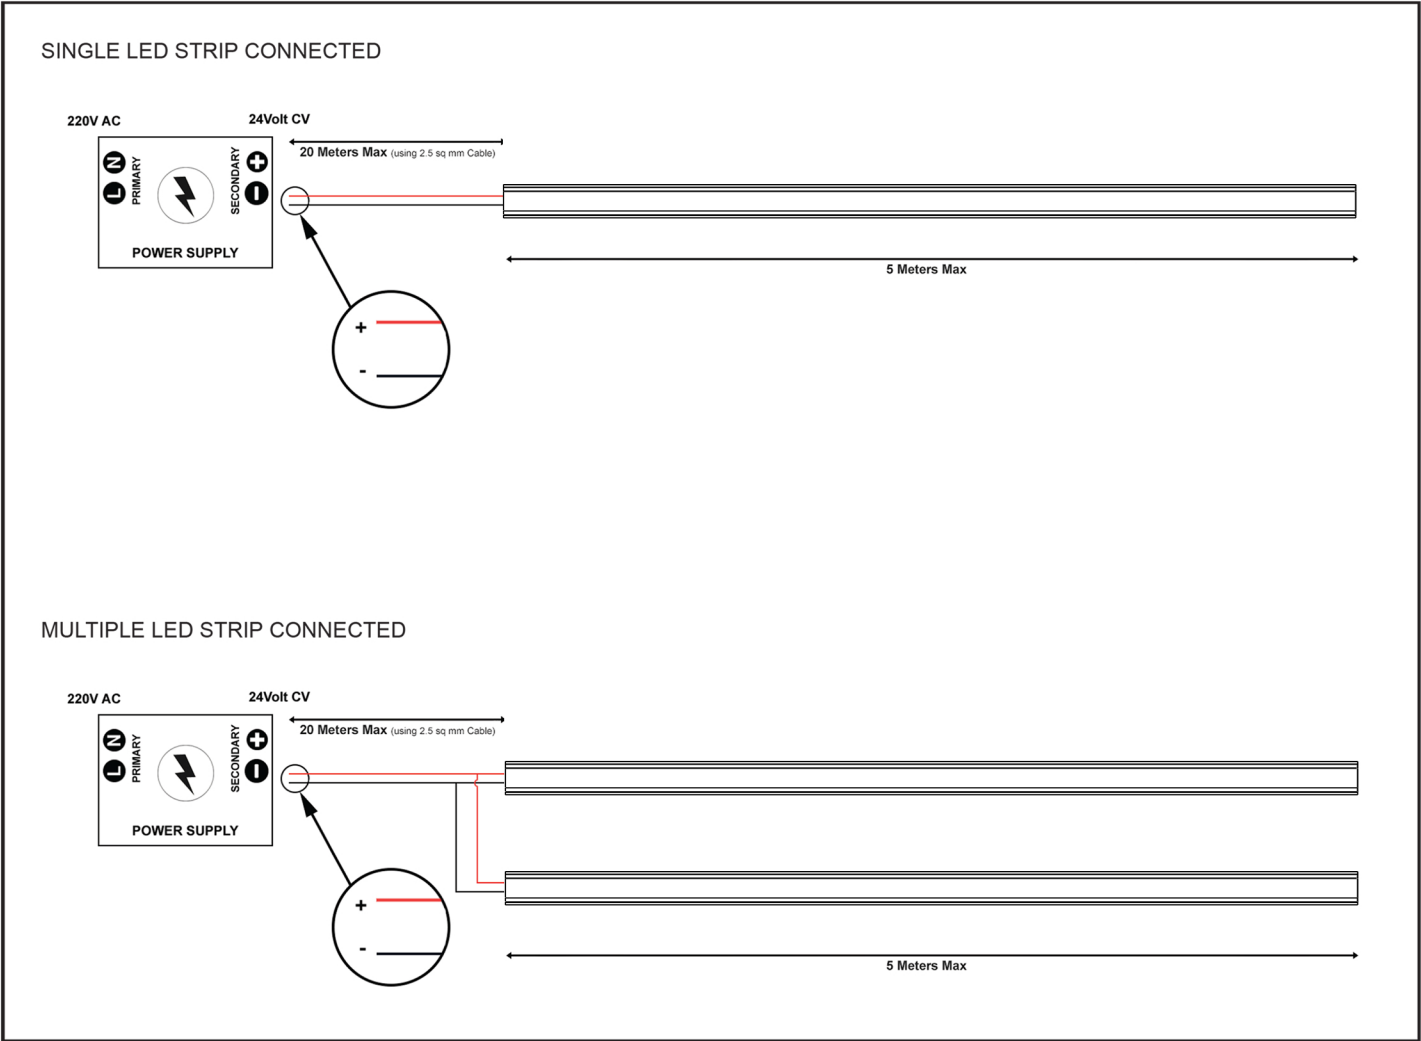

RGBW DRIVER CONNECTION

