

ZYRA Recessed Mono

ZYRA is a linear wall washer ideal for illuminating facades, walls, and outdoor spaces with elegance and precision. Designed to withstand the most demanding environments, it features an IP67 rating, ensuring waterproofing and resistance to weather conditions. Ideal for architectural and decorative applications, it combines reliable performance with a discreet and functional design.



CRI 90

≤3 MAC ADAM

IP67

220V AC

IK10

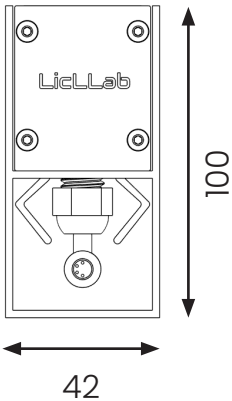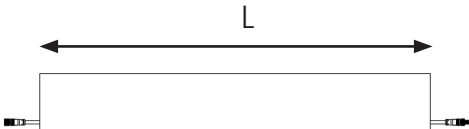

Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	CTT	+	Optics
ZYR		1 295 mm		27K 2700K		S 14°
		2 595 mm		30K 3000K		M 25°
		3 882 mm		40K 4000K		MF 36°
		4 1170 mm				F 55°
						OV 45°x15°
						WW Wall washer

Configuration Example | ZYR1.27K.S

Technical Data

Application	Ground recessed
Finish	Dark grey anodized aluminium
Dimensions	100 x 42 x length
Fitting Life	100.000h L80 B20 (Ta, 25°C) Reported TM-21 L70 Lifetime: >100000 hours
Working Temp.	-20° + 55°

Specification Product

Light Distribution	14° - 25° - 36° - 55° - 45°x15° - Wall washer
CRI	> 90
SDCM	≤ 3
Wattage	31 Watt/meter
Voltage	220 Volt

Lumen Data

CTT	1 ft - 295 mm - 9.5W Delivered Lumen	2 ft - 595 mm - 19 W Delivered Lumen	3 ft - 882 mm - 28.5W Delivered Lumen	4 ft - 1170 mm - 38W Delivered Lumen
2700K	734	1468	2202	2936
3000K	785	1570	2356	3141
4000K	785	1570	2356	3141

Driver

Built-in DALI

Recessed casing

L-FR135D	L-FR135C	L-FR135B	L-FR135A	+	KIT0009
					
For 1ft - 295 mm	For 2ft - 595 mm	For 3ft - 880 mm	For 4ft - 1170 mm		2 x caps with hole

Honeycomb

H020



For 1ft –
295 mm

H021



For 2ft –
595 mm

H022



For 3ft –
880 mm

H023



For 4ft –
1170 mm

Antiglare

L-CON031A



For 1ft –
295 mm

L-CON031B



For 2ft –
595 mm

L-CON031C



For 3ft –
880 mm

L-CON031D



For 4ft –
1170 mm

Cables

Male connector



3x0.75

L-CB152 | L = 500

L-CB154 | L = 1000

L-CB156 | L = 2000

Female connector



3x0.75

L-CB151 | L = 500

L-CB153 | L = 1000

L-CB155 | L = 2000

Male connector



M8 4x0.35

L-CB101 | L = 300

L-CB102 | L = 1000

L-CB103 | L = 5000

Female connector



M8 4x0.35

L-CB104 | L = 300

L-CB105 | L = 1000

L-CB106 | L = 5000