
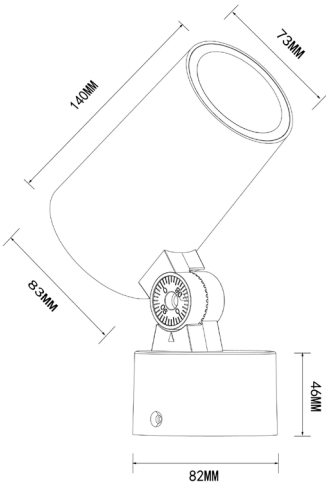


ARGO1 80mm

The ARGO family is available in three sizes ARGO1, ARGO2 & ARGO3—to meet different architectural and landscape lighting requirements. Characterized by a clean, compact design and precise light distribution, ARGO integrates seamlessly into gardens, pathways, façades and architectural environments. Each model features a built-in driver with ON/OFF control as standard, with TRIAC dimming or DALI control available as optional. RGBW versions are available on request, offering dynamic colour effects for customised lighting scenarios. The family provides a consistent design language, multiple beam angles and a versatile selection of finishes.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Finish	+	CTT	+	Optic
ARGO1		GN Green		27K 2700K		S 15°
		BK Black		30K 3000K		M 26°
		GR Grey		40K 4000K		MF 38°
		CT Corten				F 50°

Configuration Example | ARGO1.GN.27K.S

Technical Data

Application	Projector landscape
Finish	Aluminum
Dimensions	Ø 83 x 140 mm
Base	82 x 46 mm
Fitting Life	100.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime: >100.000 hours

Specification Product

Light Distribution	15° – 26° – 38° – 50°
CRI	90
SDCM	< 3
Wattage	12 Watt
Voltage	220V AC
Hz	50-60Hz

Lumen Data

CTT	Flux Lumen	Delivered Lumen
2700K	1727	1381
3000K	1727	1381
4000K	1883	1506

Included accessories

L-AGBR1



Base Round

Other Accessories not included

L-AGSP1



Spike

L-AGPF1

Pole Fixing
type 1

L-AGPF21


Pole Fixing
type 2

L-AGAG1



Antiglare

L-AGHC1



HoneyComb