
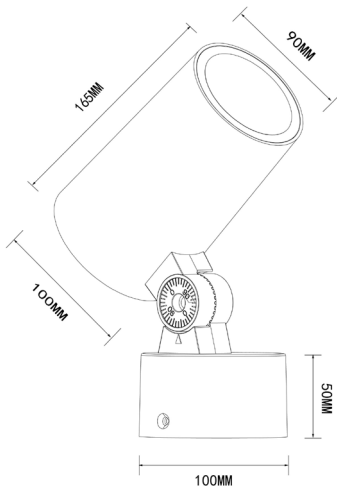


ARGO2 100mm

The ARGO family is available in three sizes ARGO1, ARGO2 & ARGO3—to meet different architectural and landscape lighting requirements. Characterized by a clean, compact design and precise light distribution, ARGO integrates seamlessly into gardens, pathways, façades and architectural environments. Each model features a built-in driver with ON/OFF control as standard, with TRIAC dimming or DALI control available as optional. RGBW versions are available on request, offering dynamic colour effects for customised lighting scenarios. The family provides a consistent design language, multiple beam angles and a versatile selection of finishes.



Product Final Code | Select a component for each column for final configuration

Product ID		Finish		CTT		Optic
ARGO2		GN Green		27K 2700K		S 14°
		BK Black		30K 3000K		M 24°
		GR Grey		40K 4000K		MF 36°
		CT Corten				F 60°

Configuration Example | ARGO2.GN.27K.S

Technical Data

Application	Projector landscape
Finish	Aluminum
Dimensions	Ø 100 x 165 mm
Base	100 x 50 mm
Fitting Life	100.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime: >100.000 hours

Specification Product

Light Distribution	14° - 24° - 36° - 60°
CRI	90
SDCM	< 3
Wattage	20 Watt
Voltage	220V AC
Hz	50-60Hz

Lumen Data

CTT	Flux Lumen	Delivered Lumen
2700K	2578	2062
3000K	2578	2062
4000K	2809	2247

Included accessories

L-AGBR2



Base Round

Other Accessories not included

L-AGSP2



Spike

L-AGPF2

Pole Fixing
type 1

L-AGPF22


Pole Fixing
type 2

L-AGAG2



Antiglare

L-AGHC2



HoneyComb