LIMITLESS Neon 16x16 Dynamic Vertical

The LIMITLESS NEON is a versatile flexible lighting solution, utilizing advanced Flexible Printed Circuit (FPC) technology. Encased in durable polyurethane, it offers exceptional waterproofing, UV resistance, and resistance to solvents and salt water, ensuring long-lasting performance in harsh outdoor environments.









Product Final Code | Select a component for each column for final configuration

Product ID	+	Wattage	+	.90.IP67	+	CTT
LV16-NEON		15W | 15W/m 75W/Reel				2756K | 2700K 5600K

Configuration Example | LV16-NEON15W.90.IP67.2756K

Technical Data

Application	Surface mounted or Recessed
Dimensions	16 x 16 x 5000 mm
Cutting	Every 100 mm
Fitting Life	L90B10 (Ta,25°C) Reported TM-21 L70 Lifetime: > 54.000h
Operating Temperature	- 20°C / + 45 °C

Specification Product

Light Distribution	Diffused 150°
CRI	> 90
SDCM	< 3
Wattage	15 Watt/m
Voltage	24 Volt DC
Class	III

Lumen Data

CTT	15W/m - 75W/Reel Delivered lm/m
2700K 5600K	876

Light Distribution

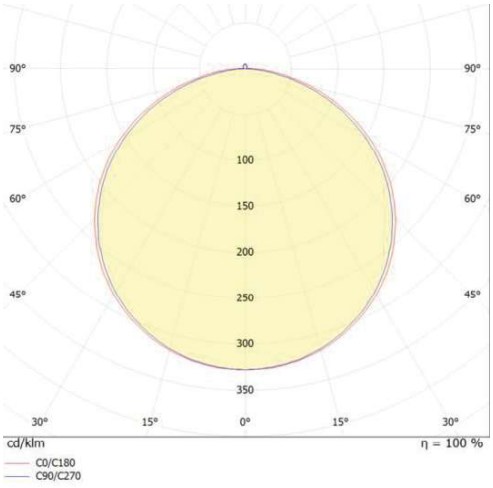

Drivers

D001



On/Off
75 Watt

D004



On/Off
150 Watt

DMX002



DMX
240 Watt
(max)

Accessories

Kit aluminium profile U



Section:
19 x 18 mm
L-AL037 | L = 1000
L-AL041 | L = 2000

Kit 10 nos aluminium porfile U



Section:
19 x 18 mm
L-AL038 | L = 30

Kit aluminium porfile U



Section:
19 x 39 mm
L-AL045 | L = 1000
L-AL046 | L = 2000

Kit aluminium porfile frame



Section:
27 x 18 mm
L-AL043 | L = 1000
L-AL044 | L = 2000

Kit aluminium porfile frame



Section:
27 x 39 mm
L-AL047 | L = 1000
L-AL048 | L = 2000