




LIMITLESS Neon 16x16 Mono Horizontal

The LIMITLESS NEON is a versatile flexible lighting solution, utilizing advanced Flexible Printed Circuit (FPC) technology. Encased in durable polyurethane, it offers exceptional waterproofing, UV resistance, and resistance to solvents and salt water, ensuring long-lasting performance in harsh outdoor environments.



Product Final Code | Select a component for each column for final configuration

Product ID	+	Wattage	+	.90.IP67	+	CTT
LH16-NEON		5W		5W/m 25W/Reel		24K 2400K
						27K 2700K
		10W				30K 3000K
						40K 4000K
		15W				50K 5000K
						75W/Reel

Configuration Example | LH16-NEON5W.90.IP67.24K

Technical Data

Application	Surface mounted or Recessed
Dimensions	16 x 16 x 5000 mm
Cutting	Every 100 mm
Fitting Life	L90B10 (Ta,25°C) Reported TM-21 L70 Lifetime: > 54.000h
Operating Temperature	- 20°C / + 45 °C


Specification Product

Light Distribution	Diffused 150°
CRI	> 90
SDCM	< 3
Wattage	5 - 10 or 15 Watt/m
Voltage	24 Volt DC
Class	III

Lumen Data

CTT	5W/m - 25W/Reel Delivered lm/m	10W/m - 50W/Reel Delivered lm/m	15W/m - 75W/Reel Delivered lm/m
2400K	263	525	788
2700K	273	545	818
3000K	290	580	870
4000K	305	610	915
5000K	313	625	938

Light Distribution

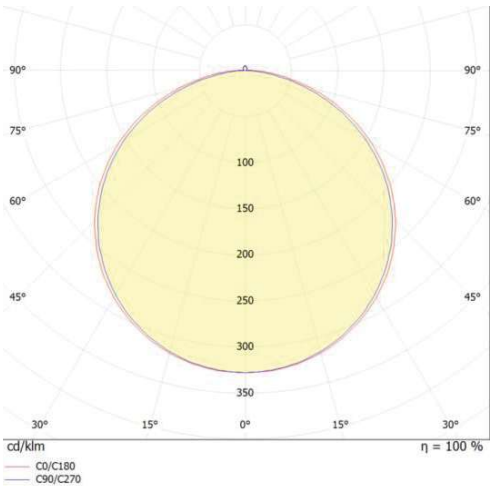

Drivers

D001	D004	D048
On/Off 75 Watt	On/Off 150 Watt	DALI 240 Watt (max)

Accessories

Kit aluminium profile U



Section:

19 x 18 mm

L-AL037 | L = 1000

L-AL041 | L = 2000

Kit 10 nos aluminium profile U



Section:

19 x 18 mm

L-AL038 | L = 30

Kit aluminium profile U



Section:

19 x 39 mm

L-AL045 | L = 1000

L-AL046 | L = 2000

Kit aluminium profile frame



Section:

27 x 18 mm

L-AL043 | L = 1000

L-AL044 | L = 2000

Kit aluminium profile frame



Section:

27 x 39 mm

L-AL047 | L = 1000

L-AL048 | L = 2000