


LIMITLESS Neon 16x16 Mono Vertical

The LIMITLESS NEON is a versatile flexible lighting solution, utilizing advanced Flexible Printed Circuit (FPC) technology. Encased in durable polyurethane, it offers exceptional waterproofing, UV resistance, and resistance to solvents and salt water, ensuring long-lasting performance in harsh outdoor environments.









Product Final Code | Select a component for each column for final configuration

Product ID	+	Wattage	+	.90.IP67	+	CTT
LV16-NEON		5W | 5W/m 25W/Reel				24K | 2400K
		10W | 10W/m 50W/Reel				27K | 2700K
		15W | 15W/m 75W/Reel				30K | 3000K
						40K | 4000K
						50K | 5000K

Configuration Example | LV16-NEON5W.90.IP67.24K

Technical Data

Application	Surface mounted or Recessed
Dimensions	16 x 16 x 5000 mm
Cutting	Every 100 mm
Fitting Life	L90B10 (Ta,25°C) Reported TM-21 L70 Lifetime: > 54.000h
Operating Temperature	- 20°C / + 45 °C


Specification Product

Light Distribution	Diffused 150°
CRI	> 90
SDCM	< 3
Wattage	5 - 10 or 15 Watt/m
Voltage	24 Volt DC
Class	III

Lumen Data

CTT	5W/m - 25W/Reel Delivered lm/m	10W/m - 50W/Reel Delivered lm/m	15W/m - 75W/Reel Delivered lm/m
2400K	263	525	788
2700K	273	545	818
3000K	290	580	870
4000K	305	610	915
5000K	313	625	938

Light Distribution

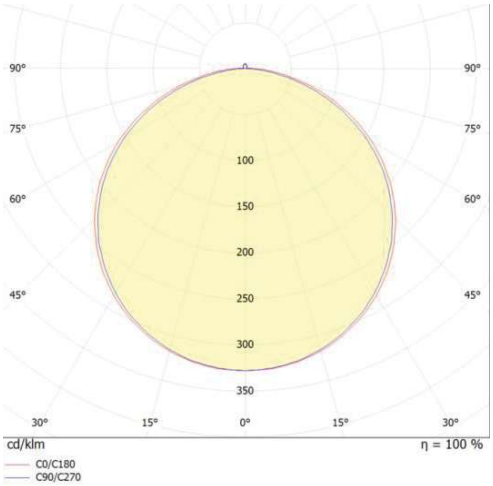

Drivers

D001



On/Off
75 Watt

D004



On/Off
150 Watt

D048



DALI
240 Watt
(max)

Accessories

Kit aluminium profile U



Section:
19 x 18 mm
L-AL037 | L = 1000
L-AL041 | L = 2000

Kit 10 nos aluminium porfile U



Section:
19 x 18 mm
L-AL038 | L = 30

Kit aluminium porfile U



Section:
19 x 39 mm
L-AL045 | L = 1000
L-AL046 | L = 2000

Kit aluminium porfile frame



Section:
27 x 18 mm
L-AL043 | L = 1000
L-AL044 | L = 2000

Kit aluminium porfile frame



Section:
27 x 39 mm
L-AL047 | L = 1000
L-AL048 | L = 2000