ORIO70 Ground Recessed

ORIO family Antiglare, the Ø70 mm ground recessed model is designed for discreet yet impactful applications. With its minimal design and compact size, it integrates seamlessly into the wall, providing effective and refined accent lighting.
Ideal for enhancing pathways, niches, or architectural details, ORIO70 Antiglare delivers high lighting performance in a miniaturized body.





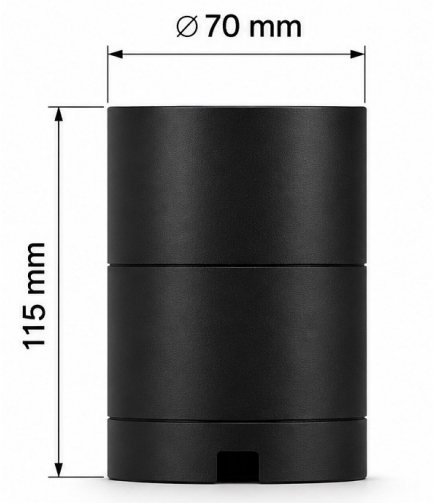



Product Final Code | Select a component for each column for final configuration

Product ID	+	CTT	+	Optics
ORIO70		27K | 2700K		SS | 11°
		30K | 3000K		S | 15°
		40K | 4000K		M | 24°
				MF | 36°
				F | 50°

Configuration Example | ORIO70.27K.SS

Technical Data

Application	Ground Recessed
Finish	AISI 316L frame and aluminium body
Dimensions	Ø 70 x 115 mm
Cut - Hole	70 mm
Fitting Life	100.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime: >100.000 hours

Specification Product

Light Distribution	11° / 15° / 24° / 36° / 50°
CRI	90
SDCM	< 3
Wattage	12 Watt
Voltage	36 Volt x 350mA
Caising	Included

Lumen Data

CTT	Flux Lumen	Delivered Lumen
2700K	1811	1545
3000K	1905	1620
4000K	1971	1676

Included accessories



Recessed casing
Ø70 x H115 mm

Drivers

D002



On/Off
75 Watt