PERFIL Plus 3040

PERFIL Plus 3040 is designed for indoor and outdoor use, this surface-mounted linear light features a durable extruded aluminum body with IP67 waterproof and IK10 impact resistance. Its polyurethane encapsulation ensures UV protection and longevity. Available in five lengths with an anodized aluminum finish, it delivers diffused mono-color lighting with high-performance 2835 LEDs (CRI>90, SDCM<3). Operating at 12W/m with a 24V constant voltage and integrated ICs, it ensures efficiency and stability.





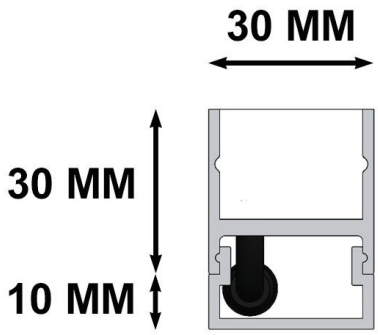

Product Final Code | Select a component for each column for final configuration

Product ID	+	Length	+	.90	+	CTT
L-PM		7W | 1ft 305mm				18K | 1800K
						22K | 2200K
		14W | 2ft 610mm				27K | 2700K
						30K | 3000K
		21W | 3ft 915mm				40K | 4000K
						50K | 5000K
		28W | 4ft 1220mm				
		35W | 5ft 1525mm				

Configuration Example | L-PM.7W.90.18K

Technical Data

Application	Surface mounted
Dimensions	30 x 40 x length / custom
Finish	Dark grey powder coating
Fitting Life	53.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime:>54000 hours
Operating Temperature	- 20°C / + 55 °C

Specification Product

Light Distribution	Diffused
CRI	> 90
SDCM	< 3
Wattage	25 Watt/m
Voltage	24 Volt DC
IK impact	IK 10
Brackets	Included

Lumen Data

CTT	7W - 1ft - 305mm Delivered lm/m	14W - 2ft - 610mm Delivered lm/m	21W - 3ft - 915mm Delivered lm/m
1800K	709	1419	2128
2200K	724	1448	2172
2700K	773	1546	2319
3000K	836	1671	2507
4000K	895	1790	2685
5000K	926	1852	2779

CTT	28W - 4ft - 1220mm Delivered lm/m	35W - 5ft - 1525mm Delivered lm/m
1800K	2838	3547
2200K	2897	3621
2700K	3097	3866
3000K	3343	4178
4000K	3580	4475
5000K	3705	4631

Drivers

D014



On/Off
75 Watt

D016



On/Off
150 Watt

D001



On/Off
75 Watt

D004



On/Off
150 Watt

Accessories

Male connector



M8 4x0.35
L-CB101 | L = 300
L-CB102 | L = 1000
L-CB103 | L = 5000

Female connector



M8 4x0.35
L-CB104 | L = 300
L-CB105 | L = 1000
L-CB106 | L = 5000

Male and female extension connector



M8 4x0.35
L-CB107 | L = 300
L-CB108 | L = 5000